


A12V Değişken Debili Pistonlu Pompa

New Development Variable Displacement Piston Pumps, High Pressure Pumps, 380/420 BAR Working Pressure. High Rotational Speed, High Efficiency, Slim Design, Cast Iron Pump Body, Re-Designed in 2025.

Designation;


40cc, 60cc, 75cc, 92cc, 120cc, 130cc, 150cc

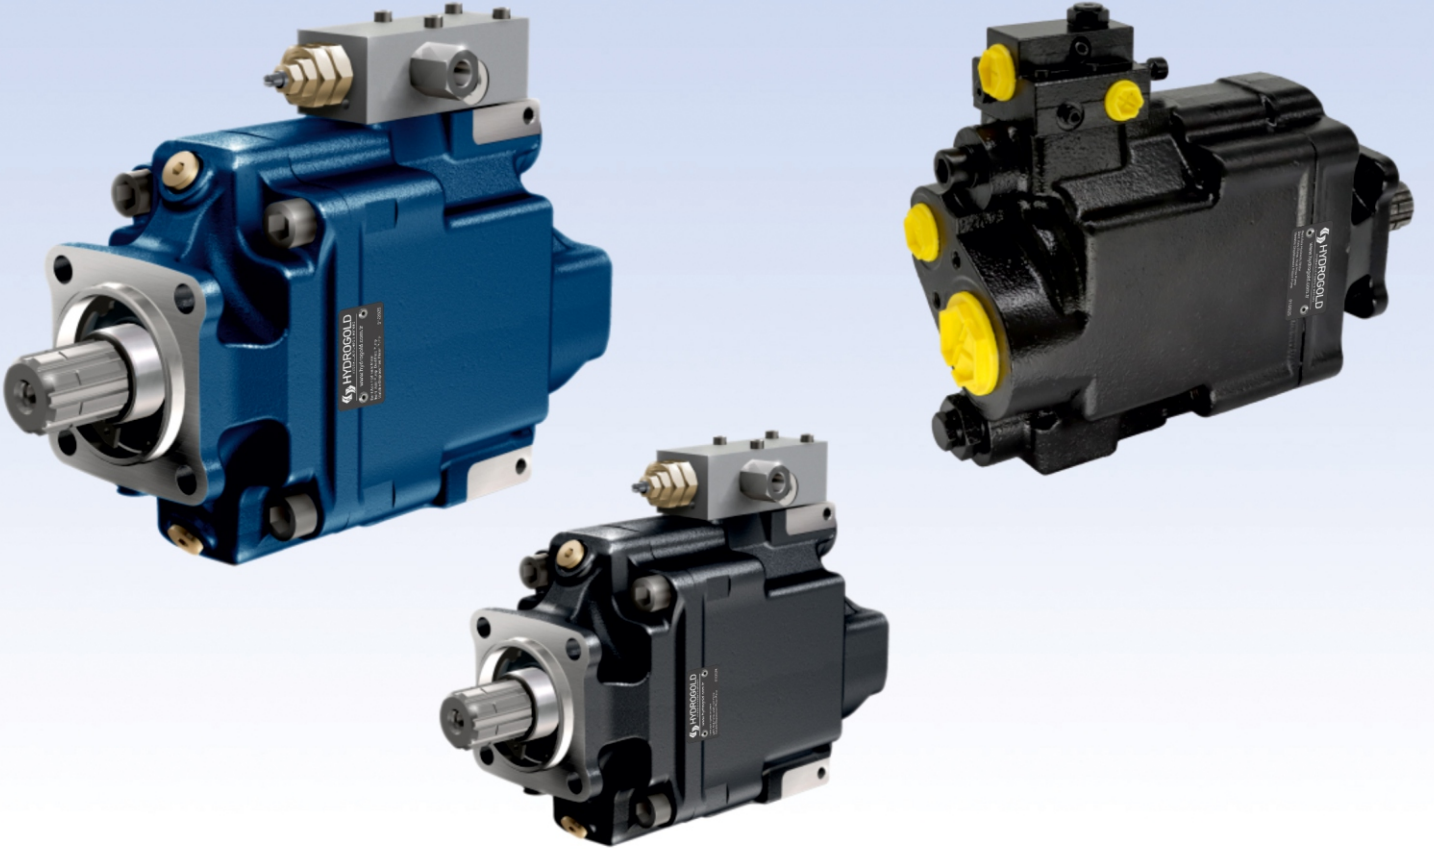



www.hydrogold.com.tr

Characteristics of the A12V Variable Dsplcmnt Piston Pumps


Pump MODEL	DISPL. (cc)	MAX. OPERATING PRESSURE (bar)	MAX. PEAK PRESSURE INTERMITTNT (bar)	TORQUE AT 300 BAR (N.m)	MAX.SPEED AT FULL DISPLACMNT (rpm)	MAX. SPEED IN STAND BY (rpm)	WEIGHT (kg)	OVERHANG TORQUE (N.m)
A12V 40 (CW/CCW) <i>new bi-directional</i>	40	400	420	225	3000	3000	26	34
A12V 60 (CW/CCW) <i>new bi-directional</i>	60	400	420	335	2600	3000	26	34
A12V 75 (CW/CCW) <i>new bi-directional</i>	75	400	420	420	2000	3000	26	34
A12V 92 (CW/CCW) <i>new bi-directional</i>	92	400	420	515	1900	3000	26	34
A12V 120 (CW/CCW) <i>new bi-directional</i>	120	380	400	675	2100	3000	26	34
A12V 130 (CW/CCW) <i>new bi-directional</i>	130	380	400	730	2100	3000	28	38
A12V 150 (CW/CCW) <i>new bi-directional</i>	150	380	400	840	2000	3000	28	38

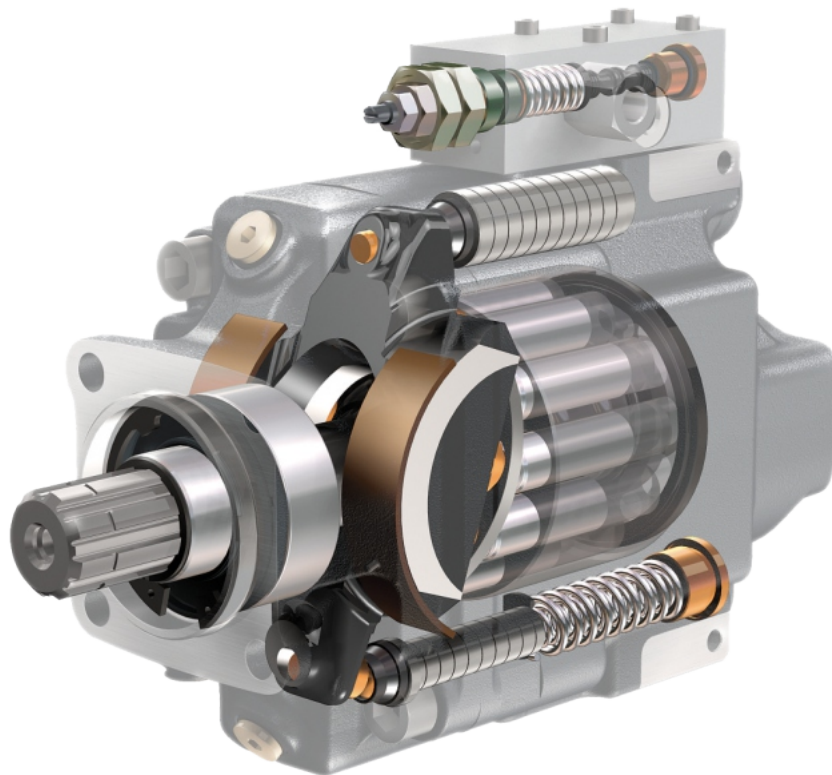

Ordering Code; A12V Variable Dsplcmnt Piston Pumps

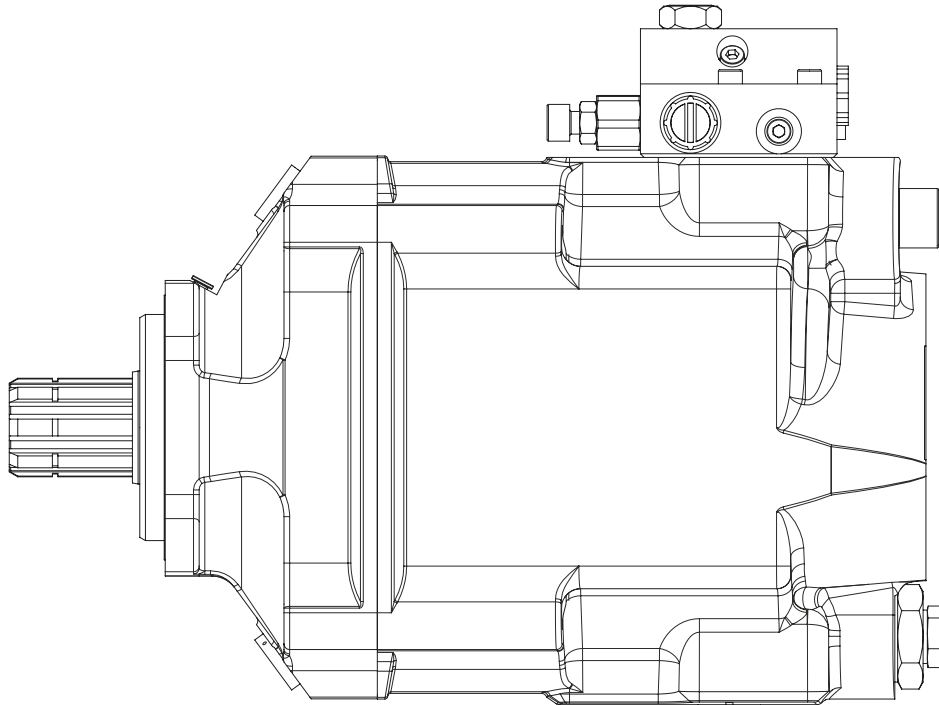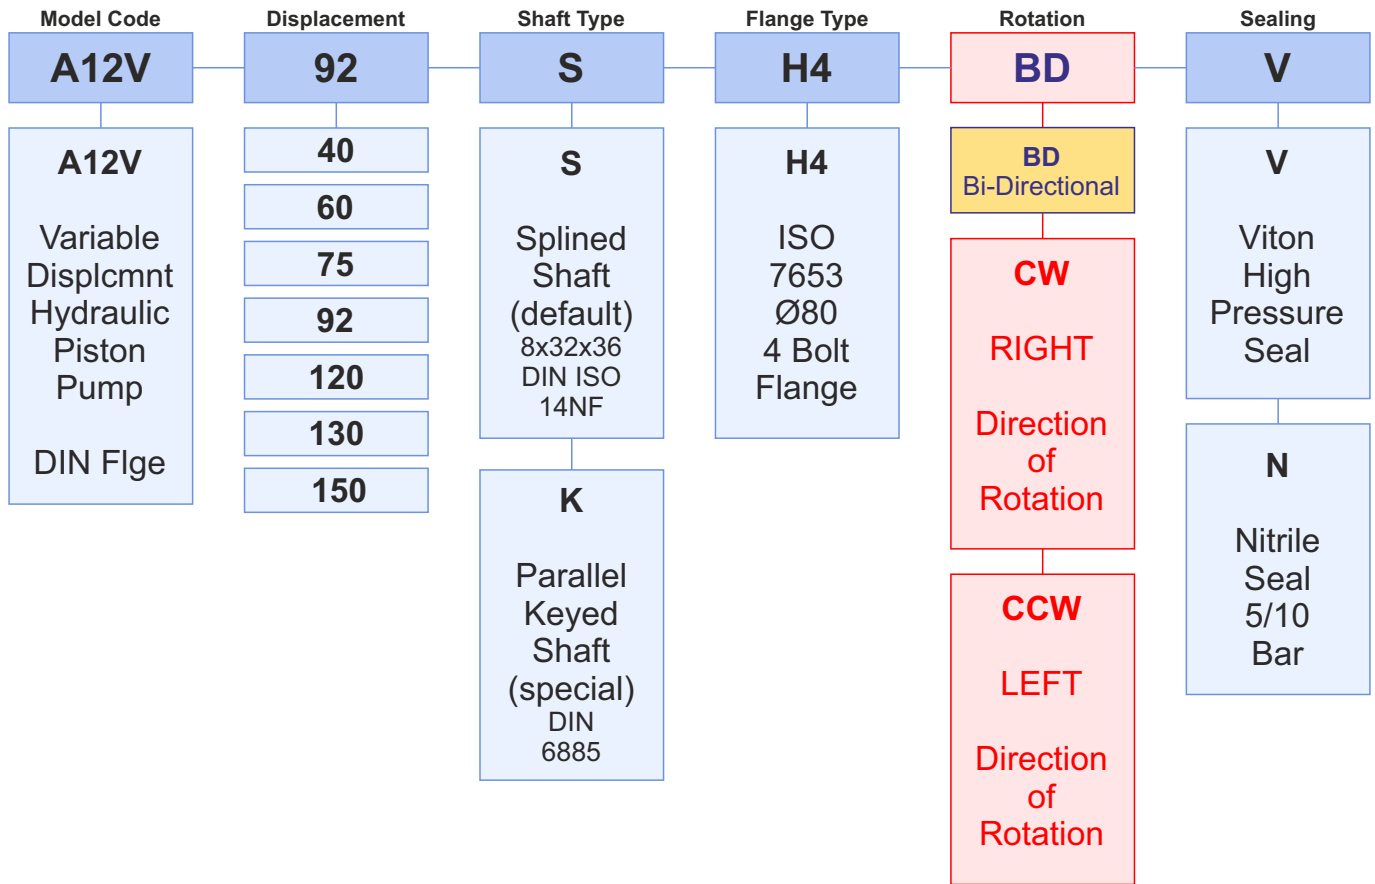


40cc, 60cc, 75cc, 92cc, 110cc, 120cc, 130cc, 150cc

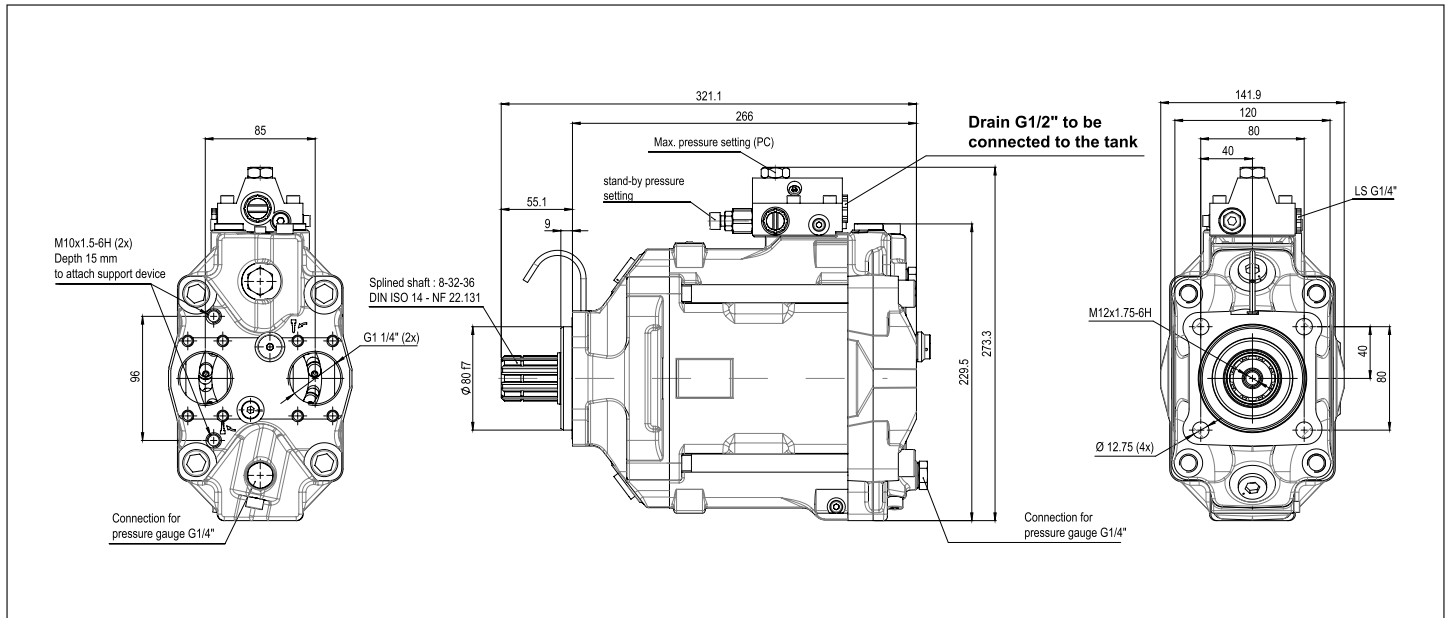



Bi-Directional Rotation

Clockwise (CW)


Counter-clockwise (CCW)

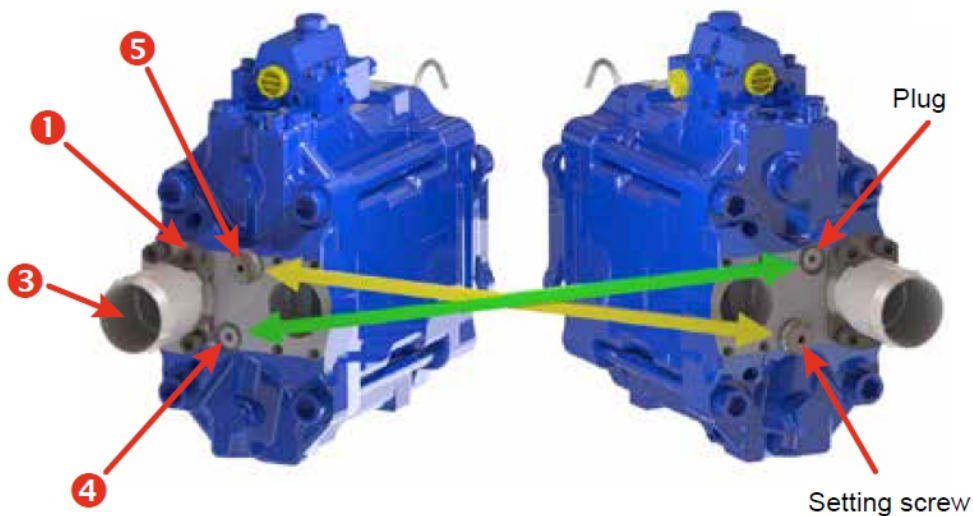


A12V - 40 cc Variable Piston Pump

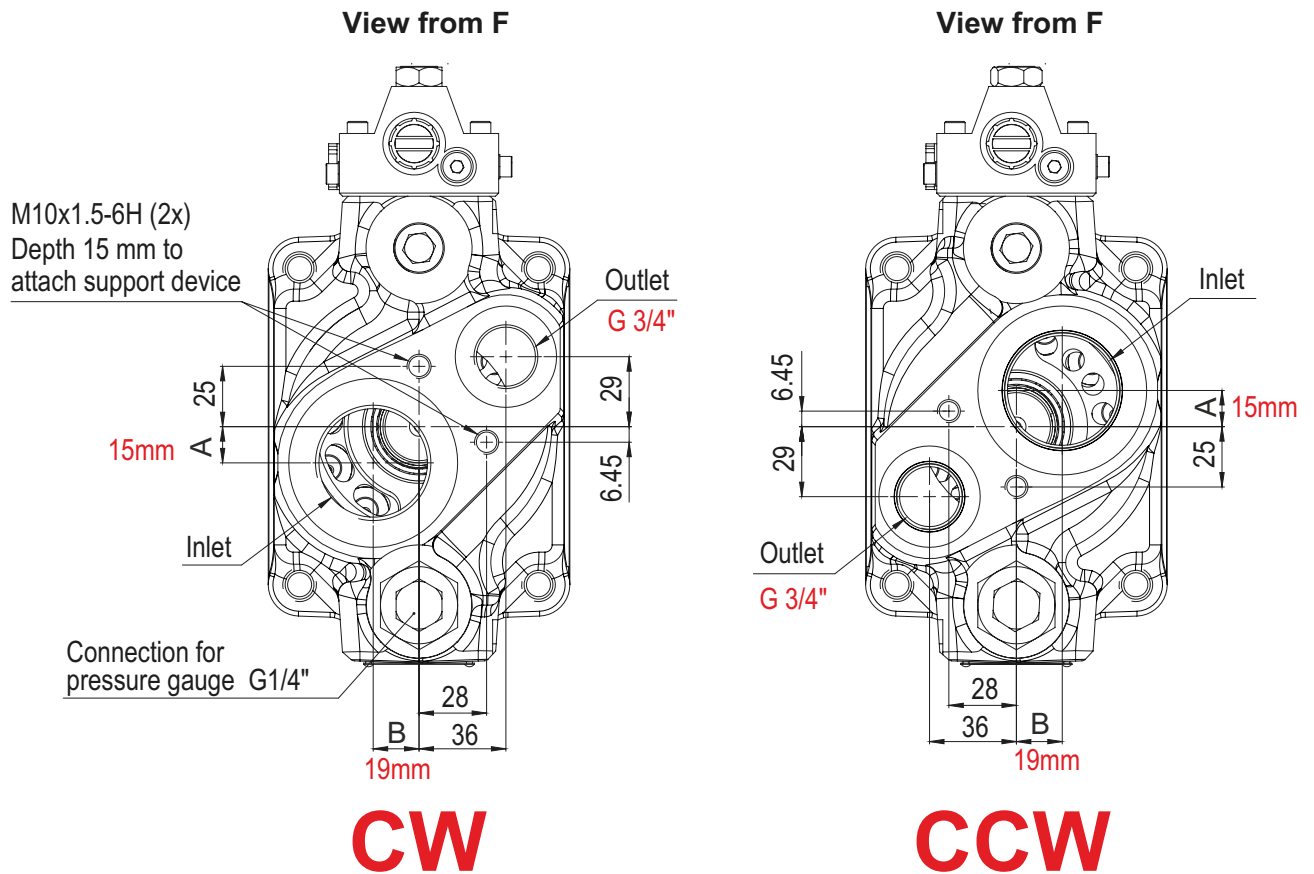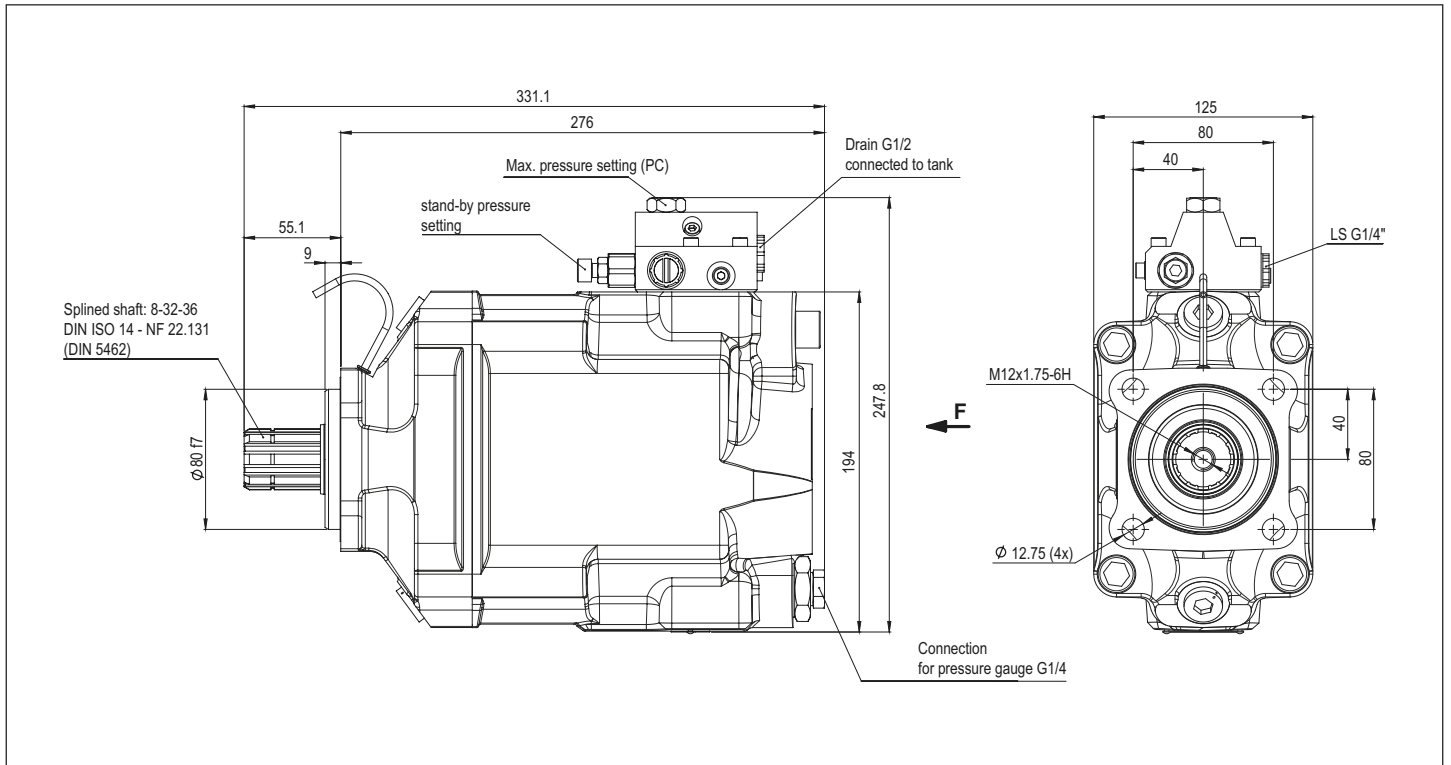

A12V - 60 cc Variable Piston Pump

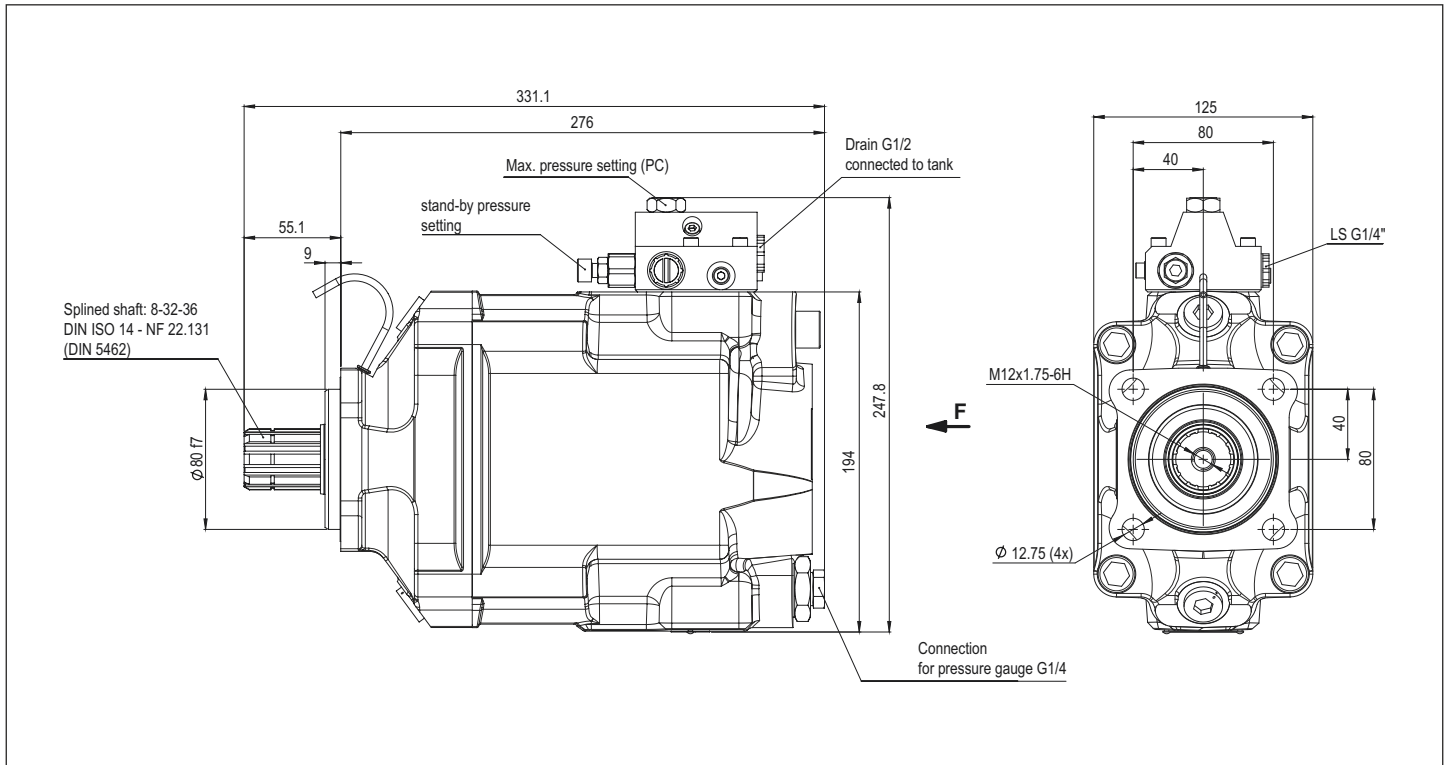


View from F

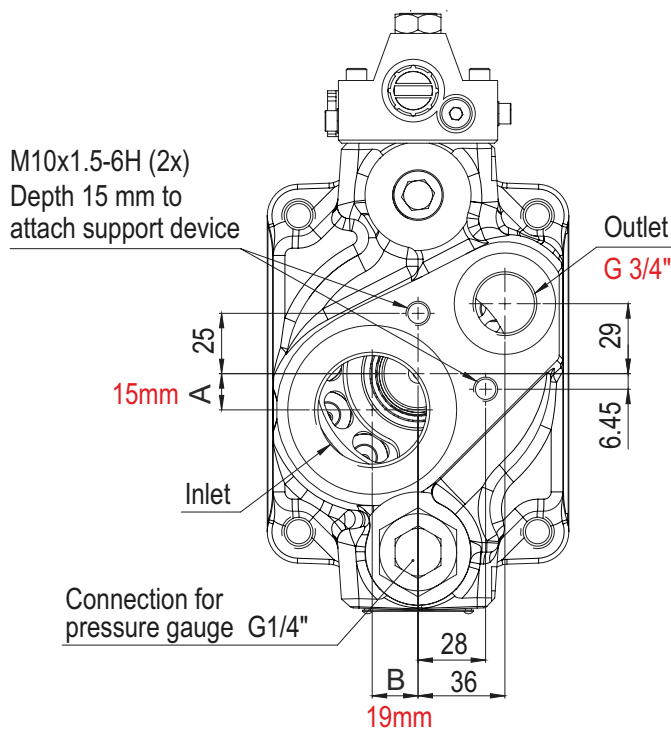


CW

View from F

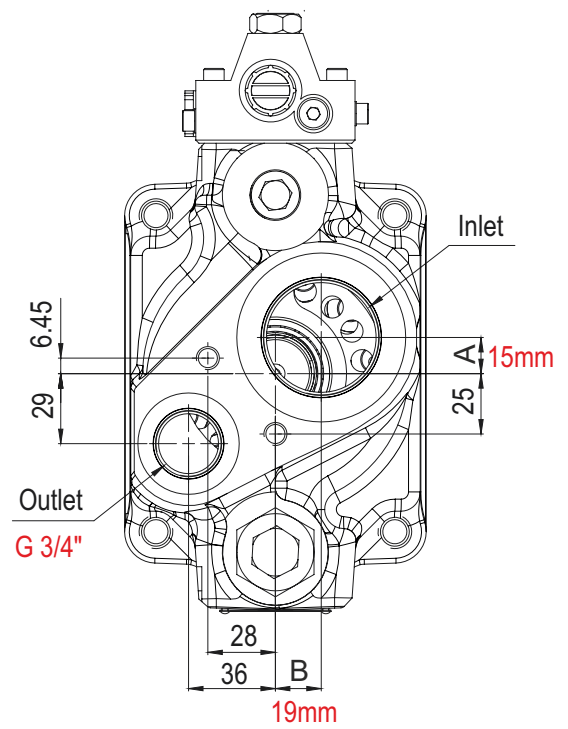


CCW

A12V - 75 cc Variable Piston Pump

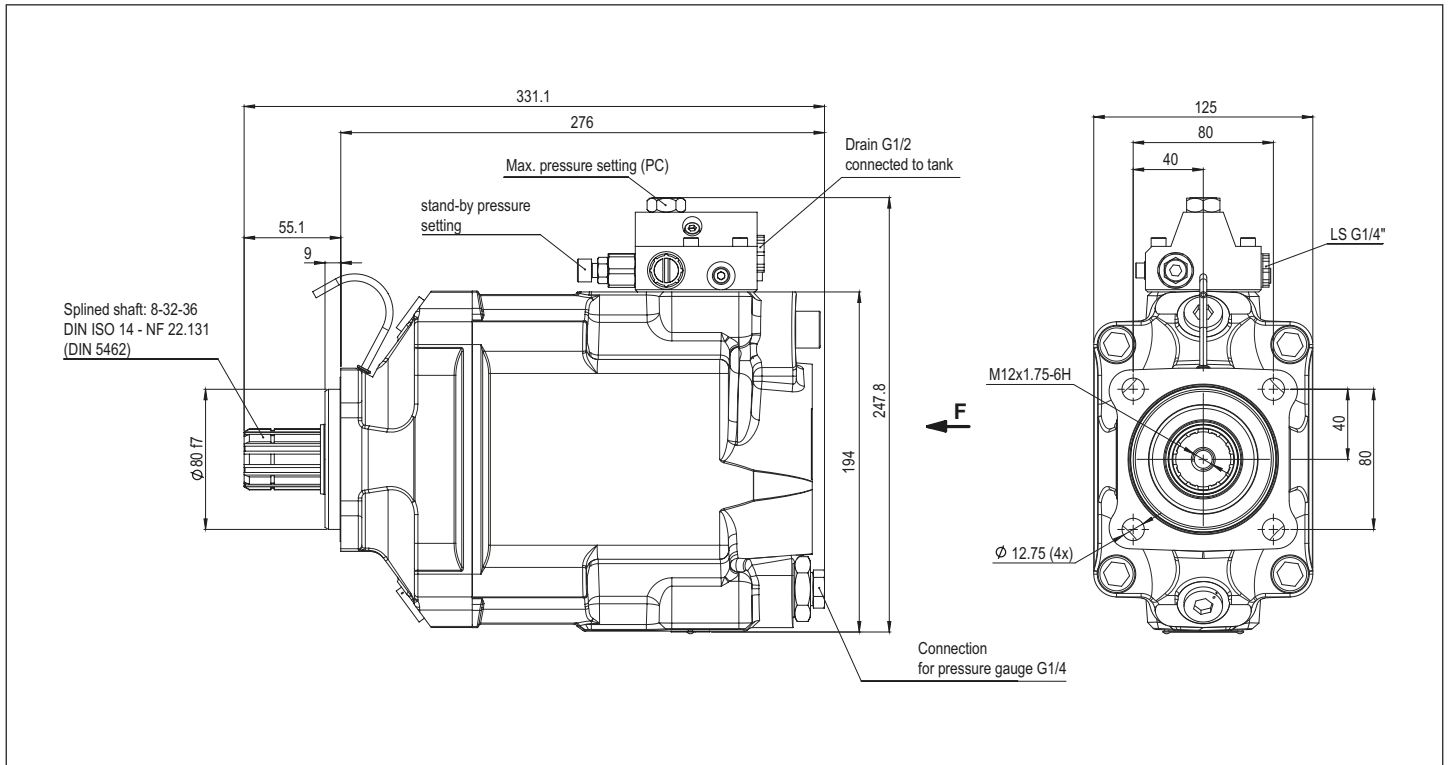


View from F

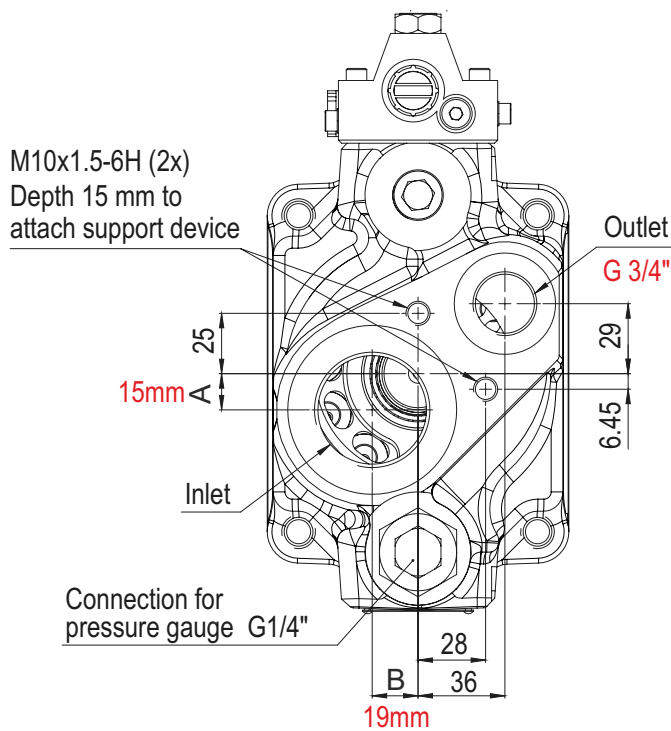


CW

View from F

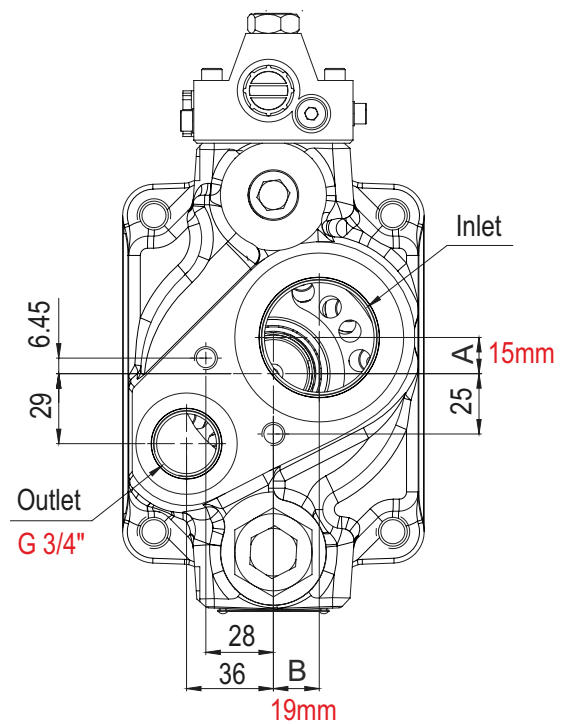


CCW

A12V - 92 cc Variable Piston Pump

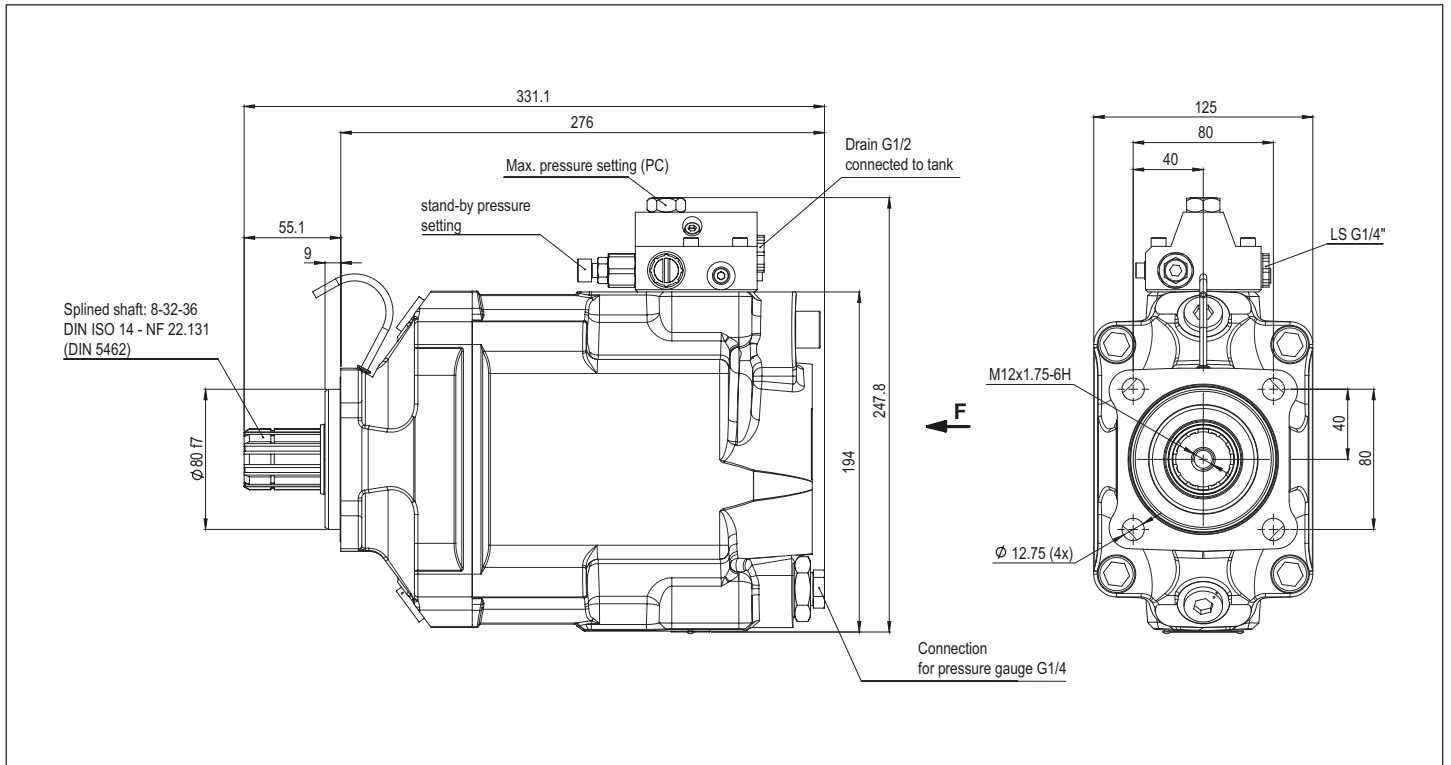


View from F

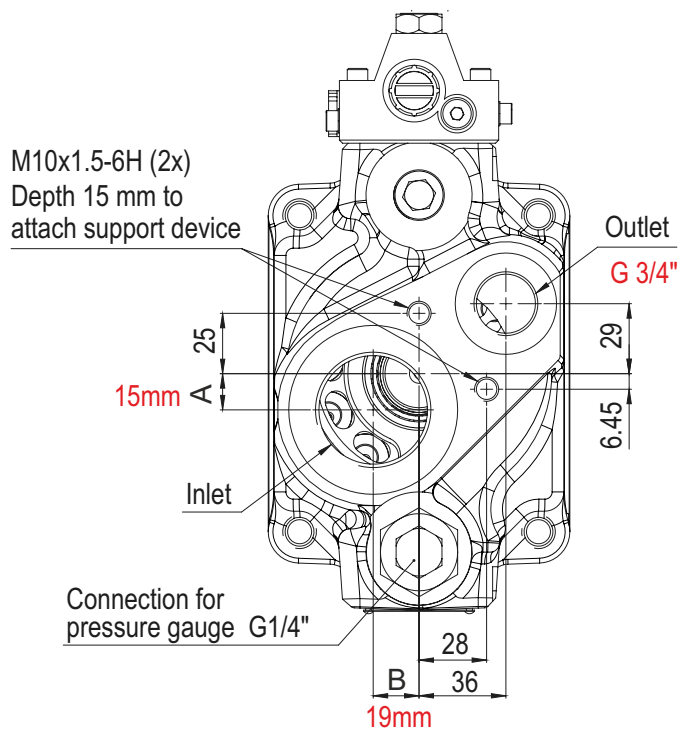


CW

View from F

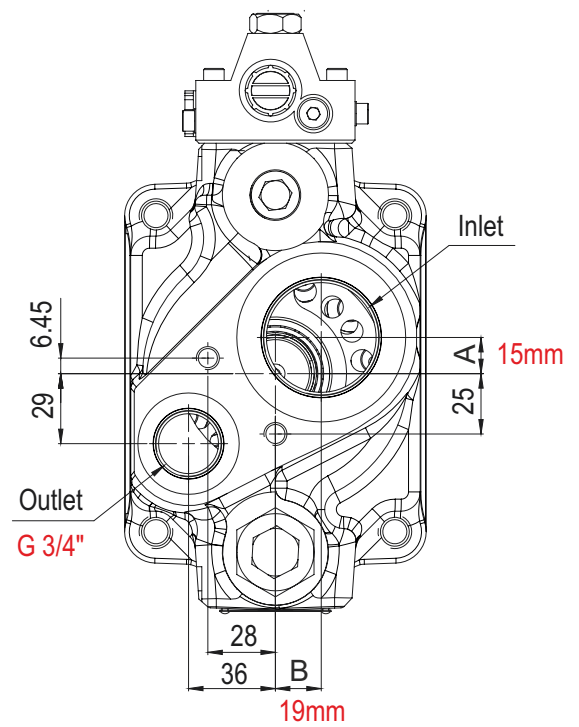


CCW

A12V - 120 cc Variable Piston Pump

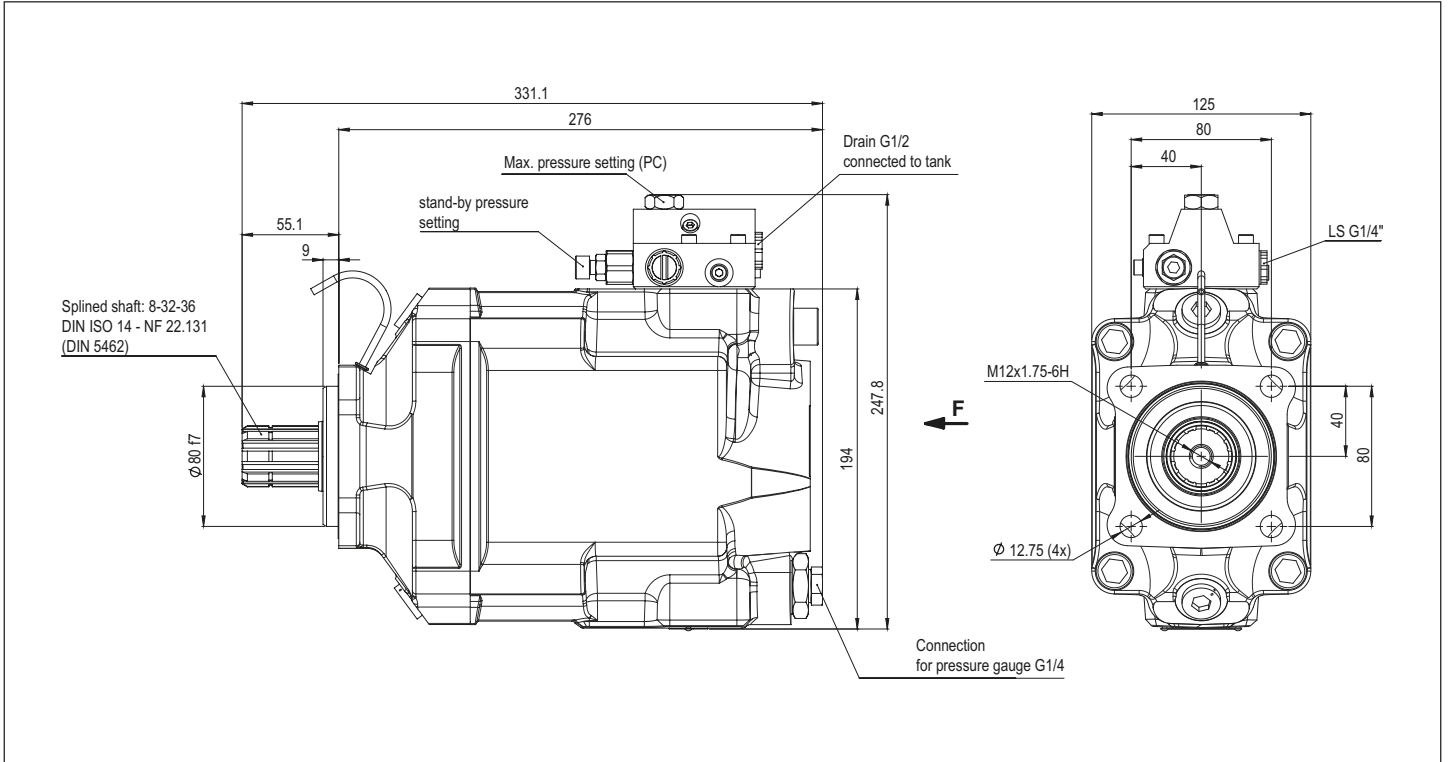


View from F

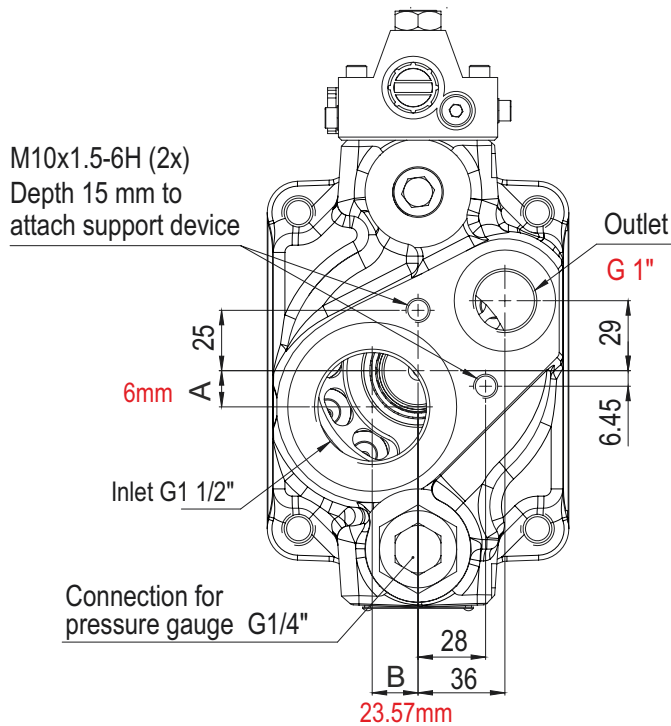


CW

View from F

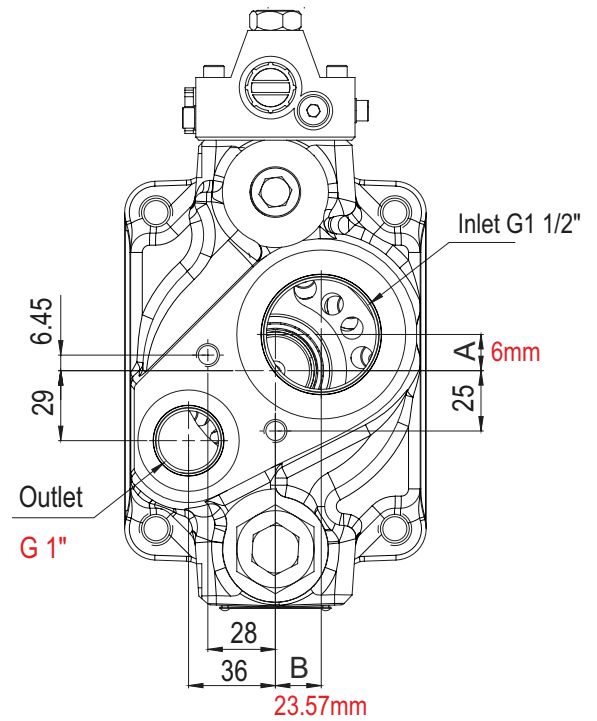


CCW

A12V - 130 cc Variable Piston Pump

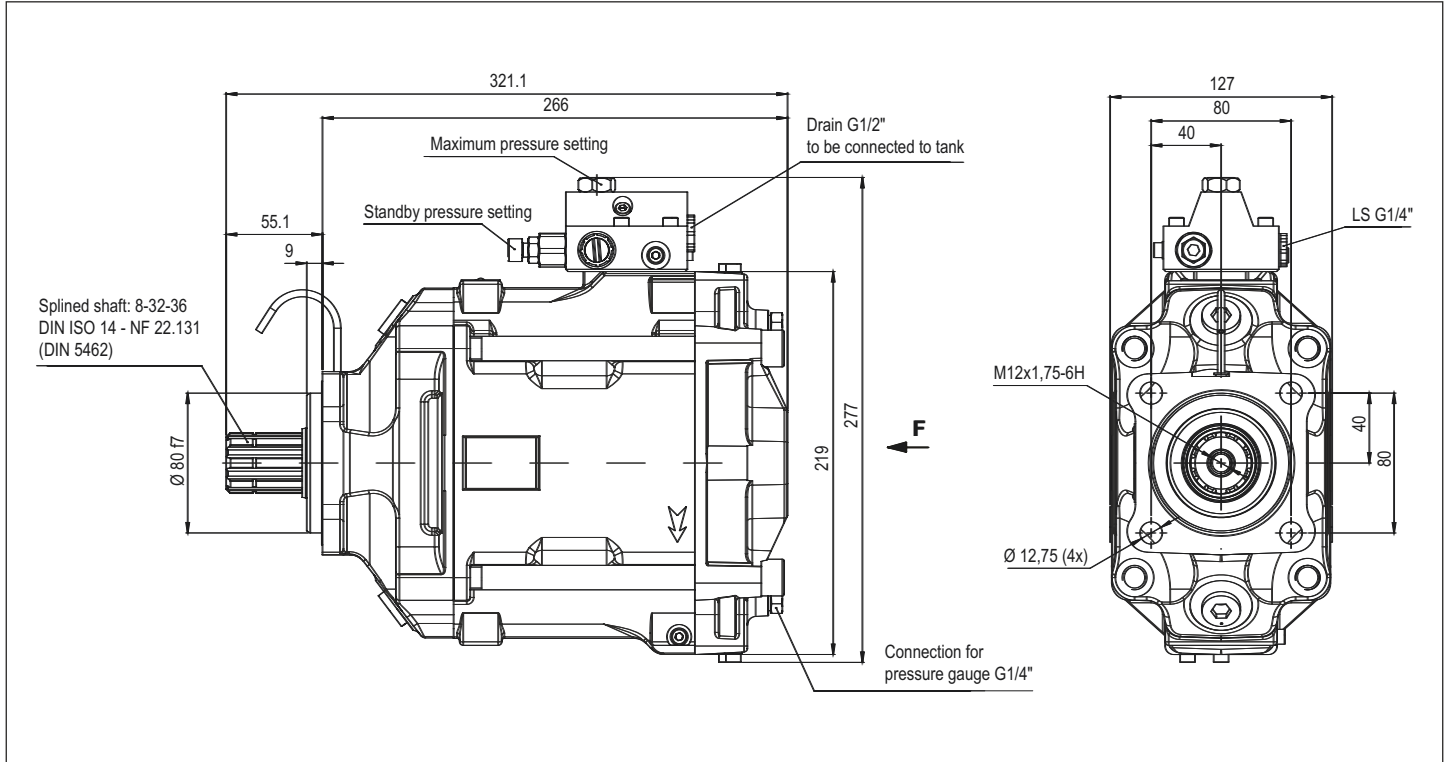

View from F


View from F

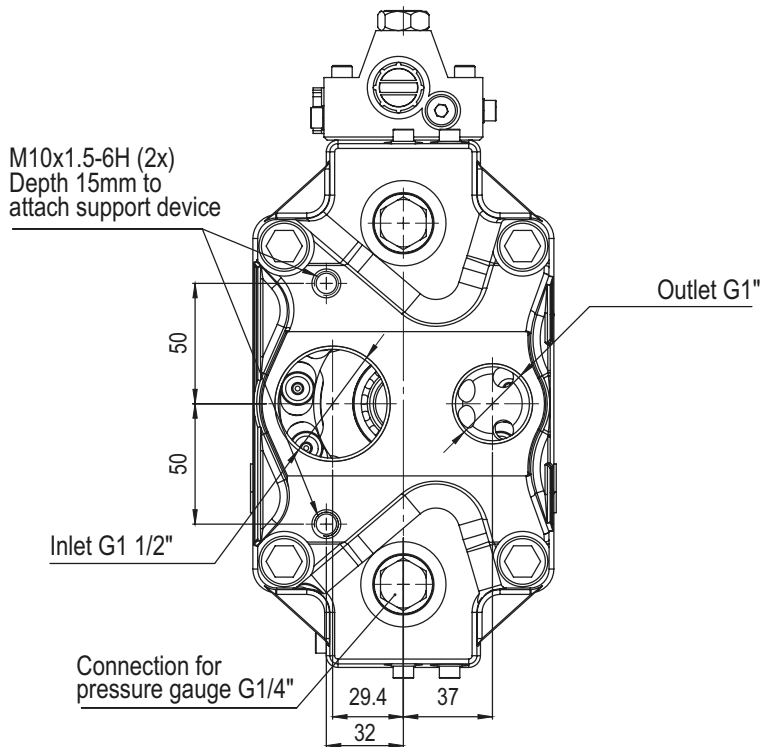

CW


CCW

A12V - 150 cc Variable Piston Pump

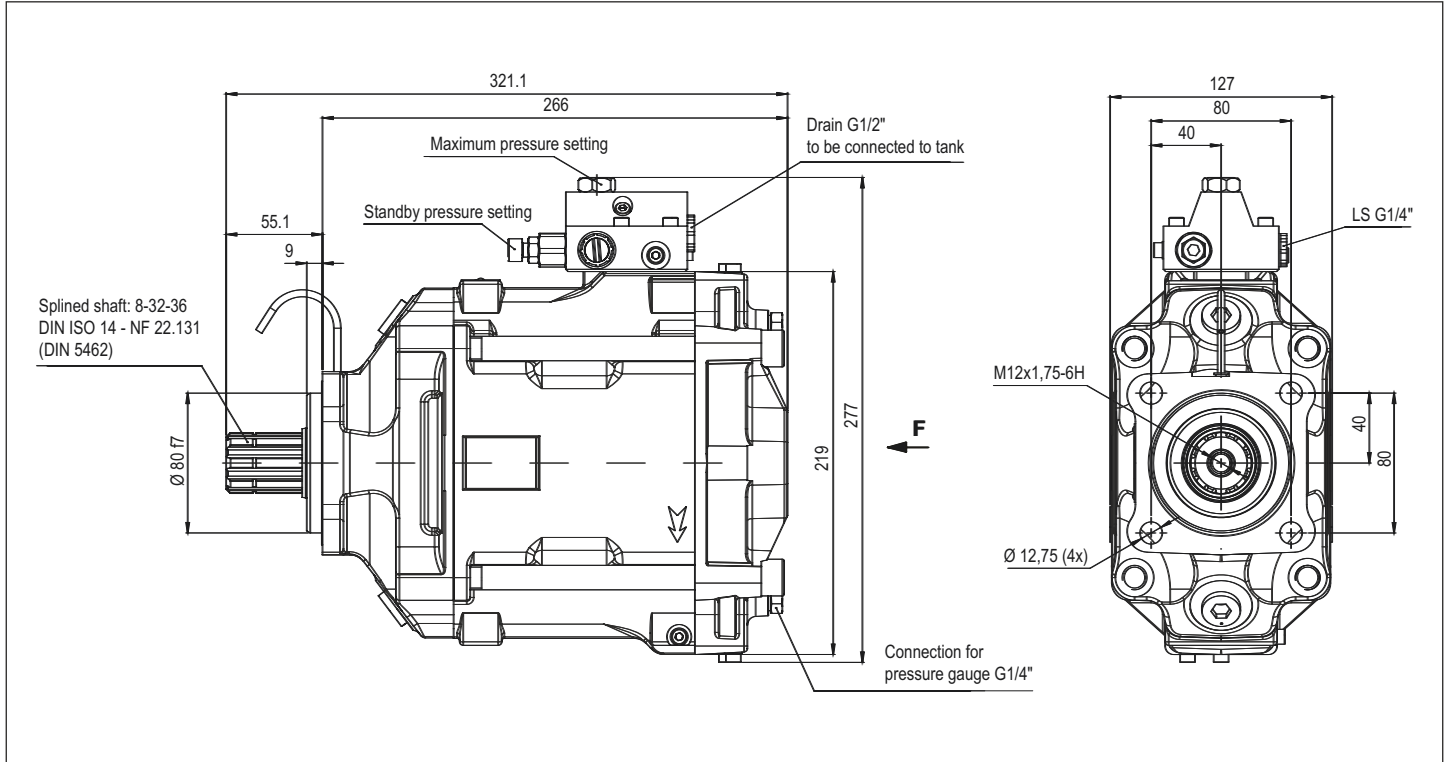

View from F

View from F

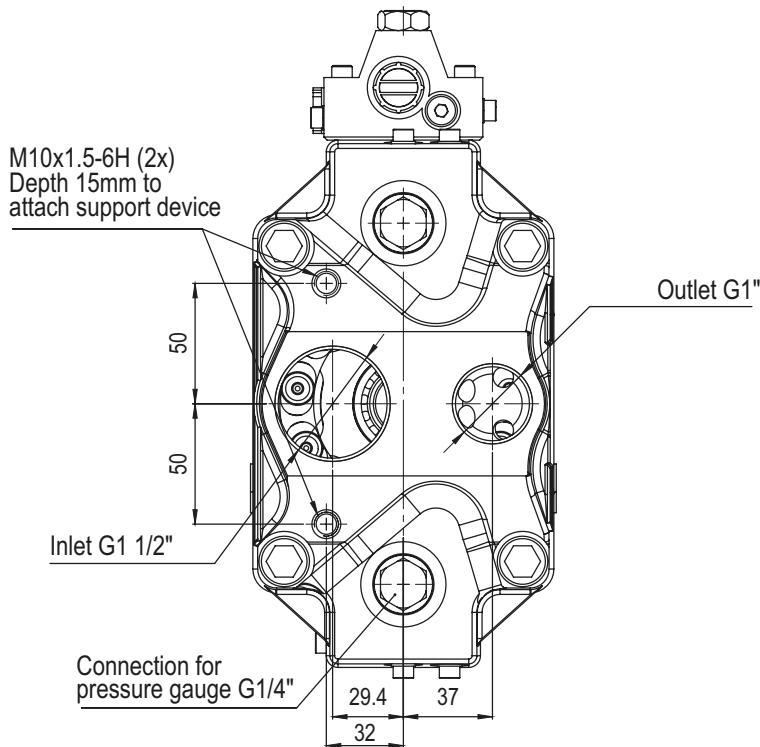

CW

CCW

Calculation of power to be supplied to the shaft as a function of flow and pressure

$$P = \frac{\Delta P \times Q}{600 \times \eta_{\text{global}}}$$



Calculation of torque to determine PTO,
as a function of the displacement and the pressure

$$C = \frac{\text{Cyl} \times \Delta P}{62.8 \times \eta_{\text{meca}}}$$

With:

- P = Hydraulic power in kW
- ΔP = Differential pressure in bar
- Q = Flow in l/min
- C = Torque in N.m
- Cyl = Displacement in cc/rev
- η_{meca} = Mechanical efficiency
- η_{global} = Mechanical efficiency + volumetric efficiency



Ideal installation

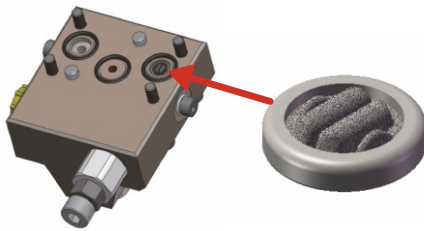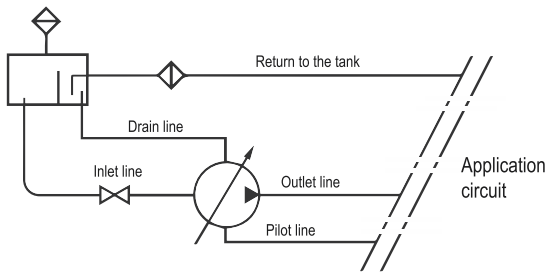





Force on pump shaft

Fr : Acceptable max. radial force = 3000 N



Fa : Acceptable axial force = 1600 N.

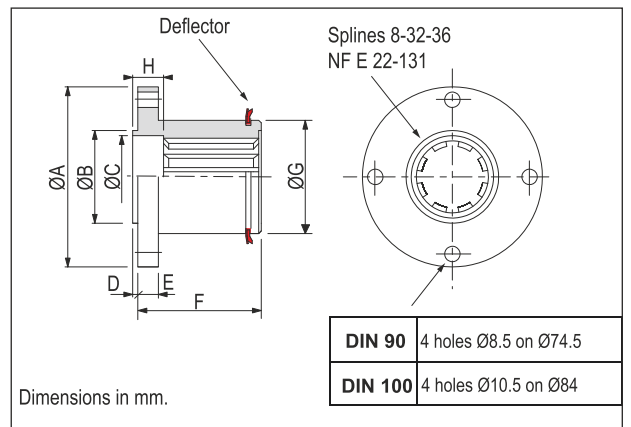

Type	ØA	ØB	C	D	E	F	ØG	H
DIN 90	90	47	43	2	10	62	55	15
DIN 100	100	57	43	2	10	64	55	15

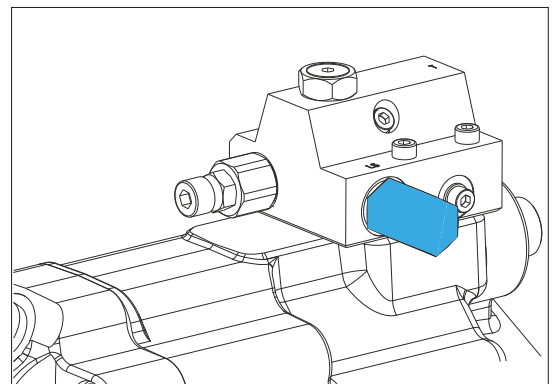

Torque and Flow


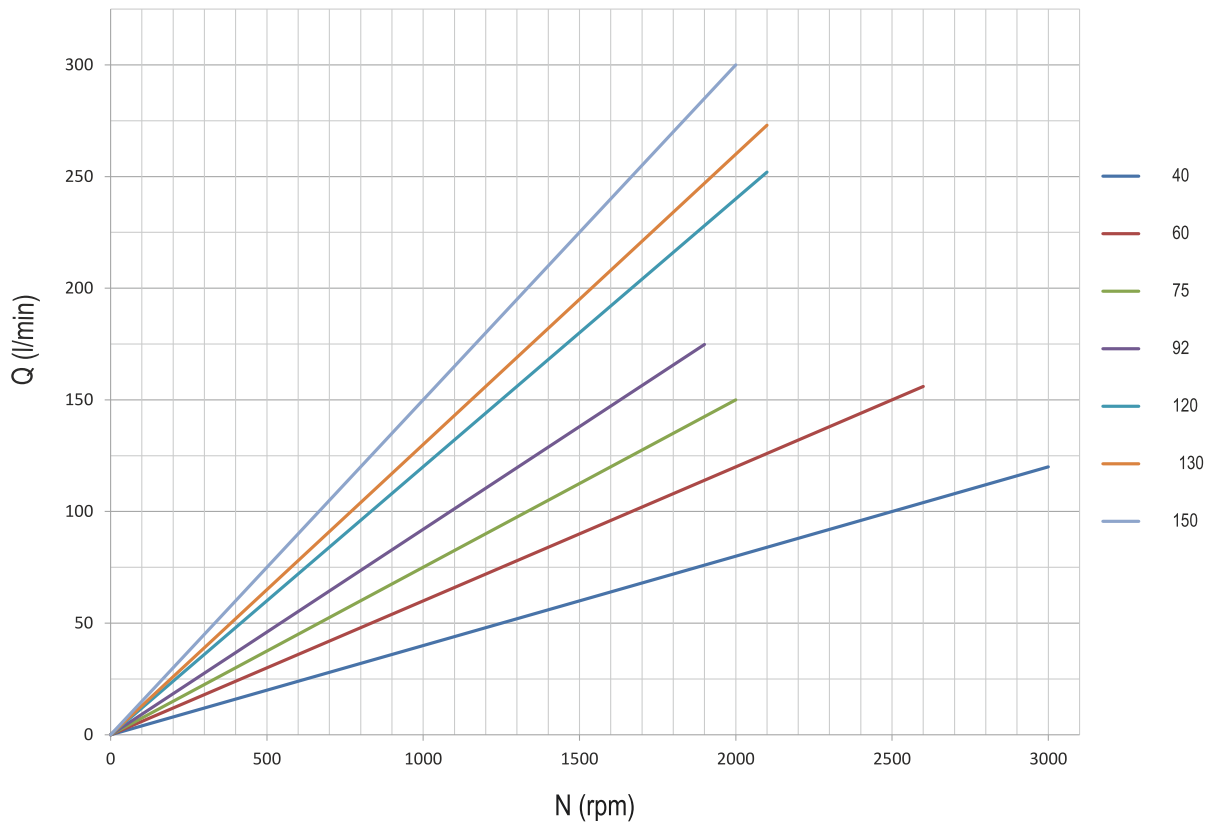
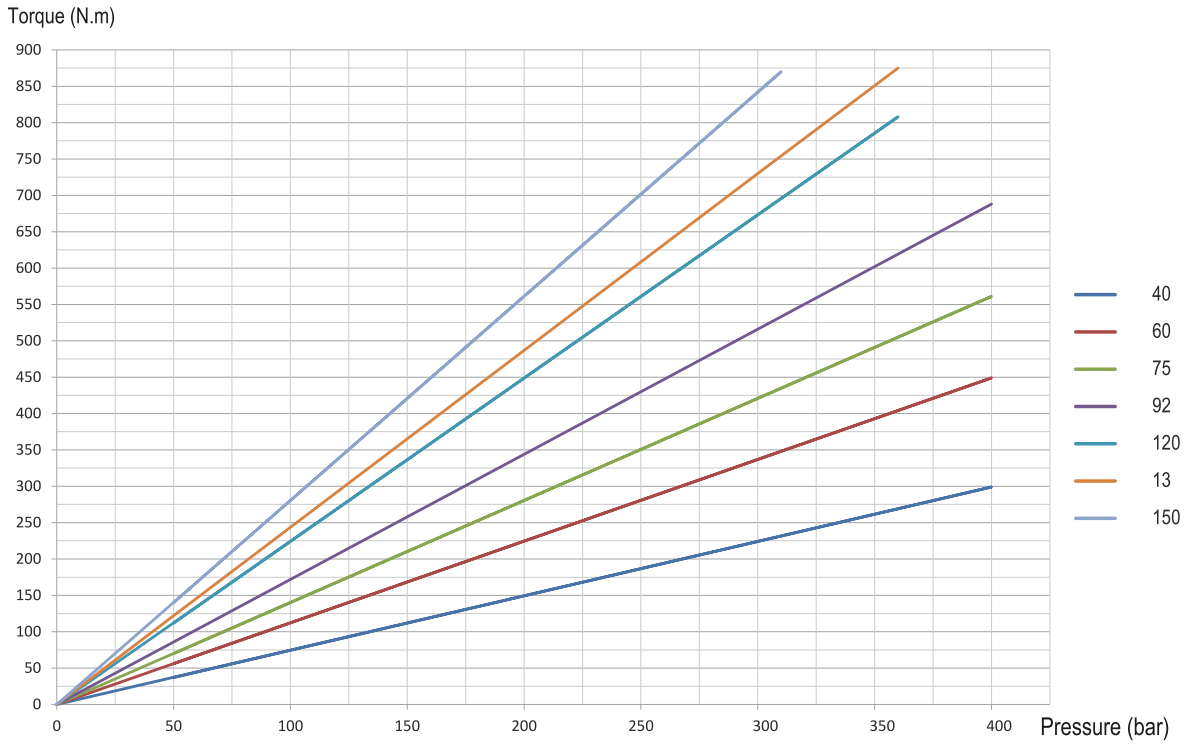


Accessories


FCV - FLUID VALVE CIRCULATION

The fluid circulation (FCV) is designed for applications where the hydraulic variable displacement pump is used in standby mode for a long period of time, for example engine PTO, to protect the pump against overheating.

- The valve flow varies between 20 and 22 l/min for a ΔP at 30 bar.
- Maximum pressure is 420 bar.
- The closing pressure is 2 bar min. and 7 bar max.

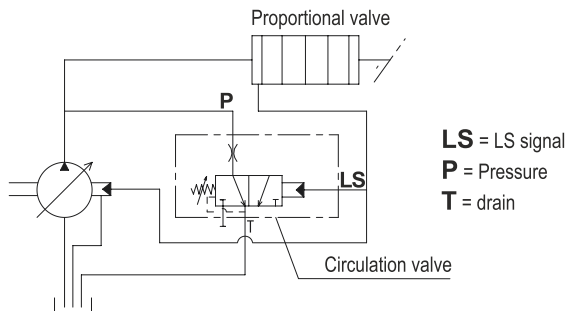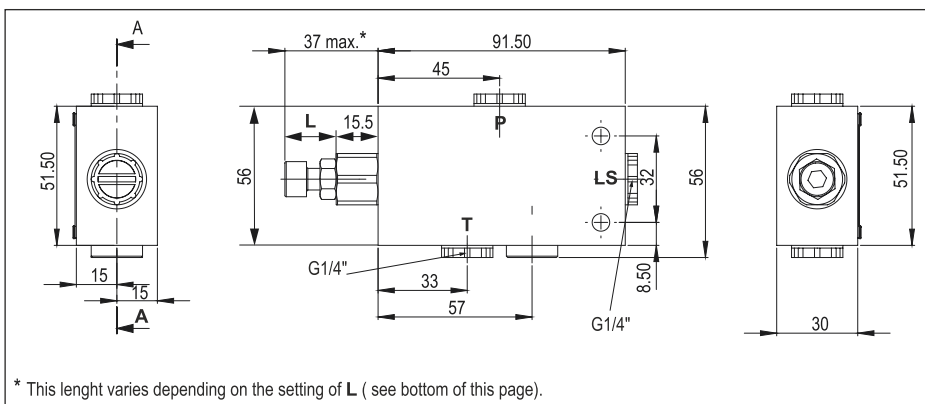

Setting of the control pressure

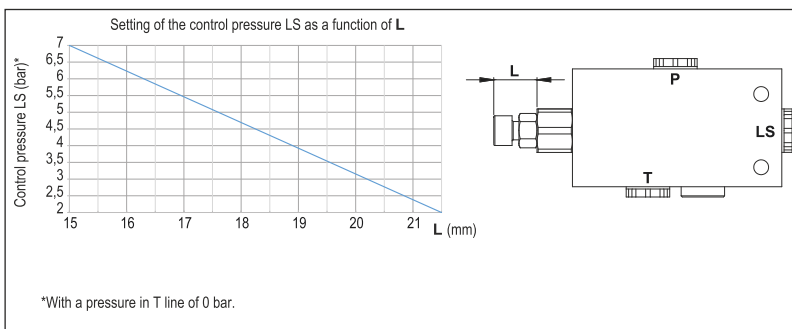

40° bent axis design giving high power, small overall dimensions, optimum efficiency and economic design. Flange and shaft designed for direct mounting on truck gearbox PTO's. The fixed displacement bent axis pumps generates a hydraulic fluid flow. It is designed for use in trucks, commercial vehicles and all stationary hydraulic applications. The Pump a fixed pump with rotary group in bent-axis design open circuits. Flow is proportional to drive speed and displacement.

For axial piston units with bent-axis design, the Pistons are arranged diagonally with respect to the drive shaft. The pump covers the whole displacement range 5 to 130 cm³/rev. The pump has been developed with modern styling and design to satisfy market demand as to designed new generation plate and pistons with give high flow performance, high pressures with high efficiency and very small dimensions.

The pump is available both to DIN and SAE world standards and can be mounted either directly at the gear box or via a drive shaft. If necessary it can also be augmented with a by-pass valve. Other brand bent axis pumps compatible and interchangeable with DIN Hydraulic Piston Pumps. Refer to the data sheet and confirmation for the technical data, operating conditions and operating limits of the bent axis piston pumps.

Formulas			
Pump Output Flow	GPM	$GPM = (\text{Speed (rpm)} \times \text{disp. (cu. in.)}) / 231$	$GPM = (n \times d) / 231$
Pump Input Horsepower	HP	$HP = GPM \times \text{Pressure (psi)} / 1714 \times \text{Efficiency}$	$HP = (Q \times P) / 1714 \times E$
Pump Efficiency	E	Overall Efficiency = Output HP / Input HP	$E_{\text{Overall}} = \text{HPOut} / \text{HPIn} \times 100$
		Overall Efficiency = Volumetric Eff. × Mechanical Eff.	$E_{\text{Overall}} = \text{EffVol.} \times \text{EffMech.}$
Pump Volumetric Efficiency	E	Volumetric Efficiency = Actual Flow Rate Output (GPM) / Theoretical Flow Rate Output (GPM) × 100	$\text{EffVol.} = \text{QAct.} / \text{QTheo.} \times 100$
Pump Mechanical Efficiency	E	Mechanical Efficiency = Theoretical Torque to Drive / Actual Torque to Drive × 100	$\text{EffMech} = \text{TTheo.} / \text{TAct.} \times 100$
Pump Displacement	CIPR	$\text{Dsplcmnt (In.}^3 \text{ / rev.)} = \text{Flow Rate (GPM)} \times 231 / \text{Pump RPM}$	$\text{CIPR} = \text{GPM} \times 231 / \text{RPM}$
Pump Torque	T	Torque = Horsepower × 63025 / RPM	$T = 63025 \times \text{HP} / \text{RPM}$
		Torque = Pressure (PSIG) × Pump Displacement (CIPR) / 2π	$T = P \times \text{CIPR} / 6.28$

- Horsepower for driving a pump** : For every 1 hp of drive, the equivalent of 1 gpm @ 1500 psi can be produced.
- Horsepower for idling a pump** : To idle a pump when it is unloaded will require about 5% of it's full rated power
- Wattage for heating hydraulic oil** : Each watt will raise the temperature of 1 gallon of oil by 1° F. per hour.
- Flow velocity in hydraulic lines** : Pump suction lines 2 to 4 feet per second, pressure lines up to 500 psi - 10 to 15 ft./sec., pressure lines 500 to 3000 psi - 15 to 20 ft./sec.; all oil lines in air-over-oil systems; 4 ft./sec.

Complete Product Range

Bent Axis Piston Motors

A9MD (DIN) Bent Axis Motors
A9MO (ISO) Bent Axis Motors
A9MS (SAE) Bent Axis Motors
A9ML (SAE2) Bent Axis Motors
A9MF (Fixed Plugin) Bent Axis Motors
A10M (HYBRID) Bent Axis Motors
A7GM Hydraulic Gear Motors
A7GMT Tandem Hydraulic Gear Motors

Bent Axis Piston Pumps

A8P (Aluminum) Bent Axis Pumps
A8PD (DIN) Bent Axis Pumps
A8PO (ISO) Bent Axis Pumps
A8PS (SAE) Bent Axis Pumps
A8PF (Fixed Plugin) Bent Axis Pumps
A10 (HYBRID) Bent Axis Pumps
A11 (ISO2) Bent Axis Pumps
A11 (SAE2) Bent Axis Pumps

Variable Displacement Pumps

A12V Variable Displacement Piston Pumps

Dual Flow Piston Pumps

A8PL (DIN) Dual Flow Pumps

Axial Piston & Gear Pumps

A4PP Axial Hydraulic Piston Pumps
A6HP High Pressure Piston Pumps
A7GP Hydraulic Gear Pumps
A7GPT Tandem Hydraulic Gear Pumps

Valve (ByPass) (Flushing) (Cavitation)

Circulation Valve
ByPass Valve
Anti-Cavitation Valve
Flushing Valve
LS Valve
AntiShock Valve
Speed Sensor

Hydraulic Spare Parts

Suction Fittings
Couplars
Adapters
Flanges
Power Take Off
Monoblock Valve
Section Valve

Hydraulic Pumps, Motors

Bent Axis Hydraulic Piston Motors, Bent Axis Hydraulic Piston Pumps, Piston Pumps, Variable Displacement Piston Pumps, Variable Displacement Piston Motors, Axial Piston Pumps, High Pressure Piston Pumps, Gear Pumps, Gear Motors, Hydraulic Valve.

www.hydrogold.com.tr

Address;

HYDROGOLD HİDROLİK PNM. MAK. SAN. TİC. LTD. ŞTİ.

Address; (Fabrika, İmalat)

Fevzicakmak Mah. Sıla Cad. Kobisan 3 San. Sit.

No: 73 / C Karatay – Konya, PO Code; 42050, Türkiye

Address; (Montaj, Sevkiyat)

Fevzicakmak Mah. Sıla Cad. Kobisan 3 San. Sit.

No: 71 / AD Karatay – Konya, PO Code; 42050, Türkiye

Phone; +90 332 248 92 01

info@hydrogold.com.tr